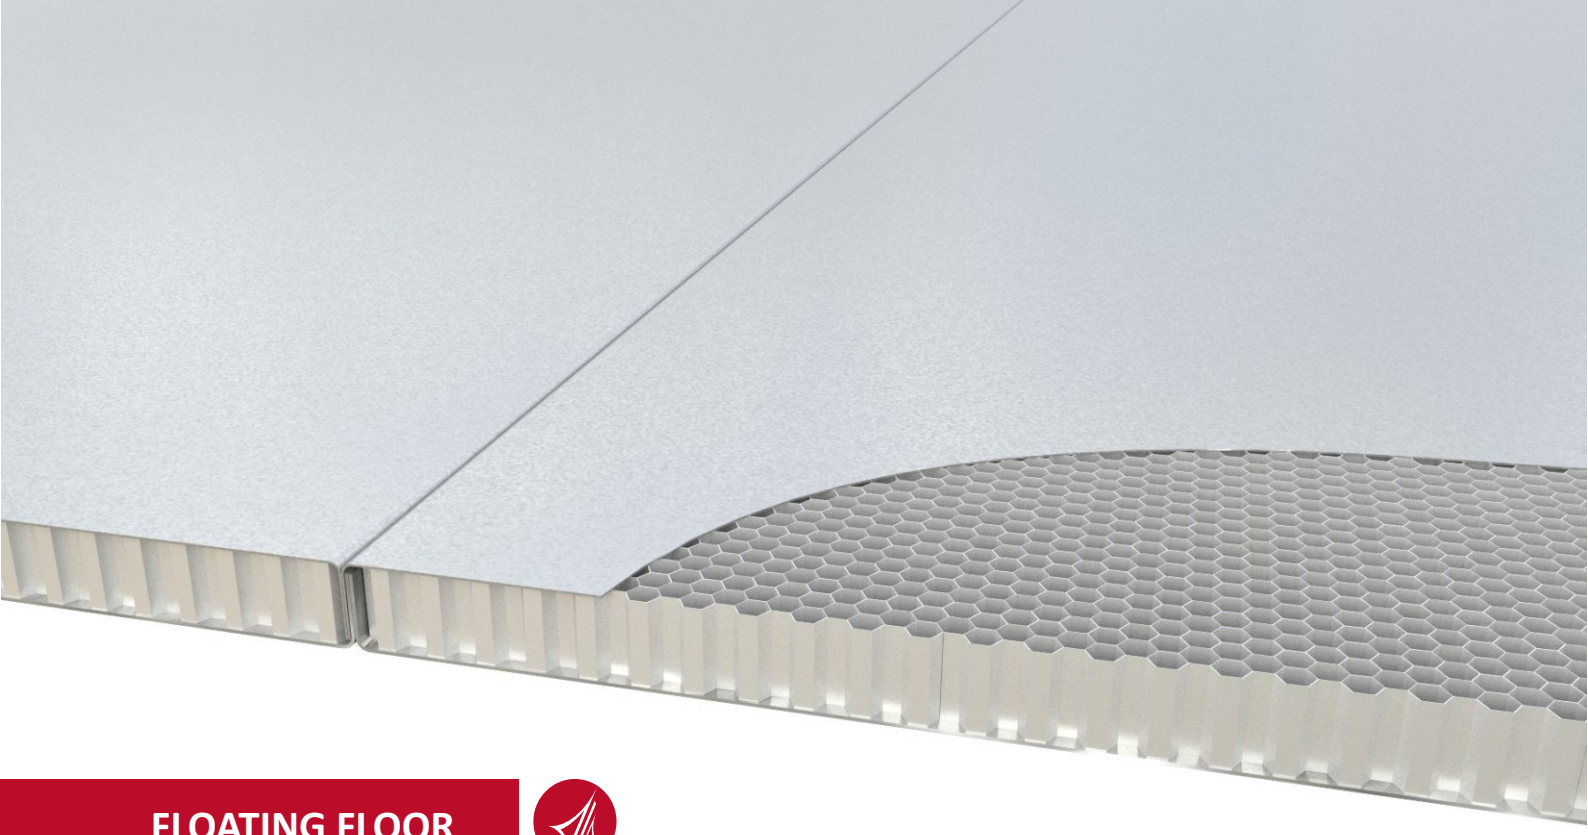

FLOATING FLOOR

HONEYCOMB FLOATING FLOOR

Honeycomb floating flooring is recommended where robust and long-lasting divisions are required. It is a lightweight system, which can be about 1/3 of the conventional system.

These floor panels are adequate for indoor C class divisions or the like in conventional ships, or for divisions in general, without class requirements in warships, especially in high-speed vessels.

These floor panels are supplied with aluminum honeycomb filling and aluminum or stainless steel plating. The stainless steel plating is particularly recommended for wet areas.

The standard division thickness is 25mm, although it may be adapted to the customer requirements for any thickness, the same as the panels measures.

DESCRIPTION	HONEYCOMB FLOATING FLOOR
Class:	C
Thickness:	25mm (STD)
Core material:	Honeycomb
Covering:	Galvanized steel plating
Length:	3000mm (adjustable)
Standard width:	1500mm (adjustable)
Weight:	14kg/m^2

ISONELL ACCOMMODATION SYSTEMS